

# Floodlights ATUR3

## Quickinfo

### LUMINAIRE

Ceiling, wall, pole  
Surface-mounted  
Aluminum, gray RAL9006  
IP66, IK08



### LED


3000K, 4000K  
CRI>80, initial MacAdam 4 SDCM  
100.000h L80

### LIGHT DISTRIBUTION



### ELECTRIC

ON/OFF, 0-10V dimming  
DALI dimming




### Description

The high-performance floodlight made of die-cast aluminum sets new standards for robust and efficient lighting solutions in both indoor and outdoor applications.

ATUR3 combines a compact design with low weight while delivering impressive performance. An asymmetric light distribution ensures targeted illumination of large areas, while the highly efficient LEDs provide high luminous efficacy with low energy consumption. Removable and individually positionable control gear units guarantee safety and long service life.

The adjustable mounting bracket enables flexible installations, while the replaceable components make the floodlight a long-term and maintenance-friendly investment.


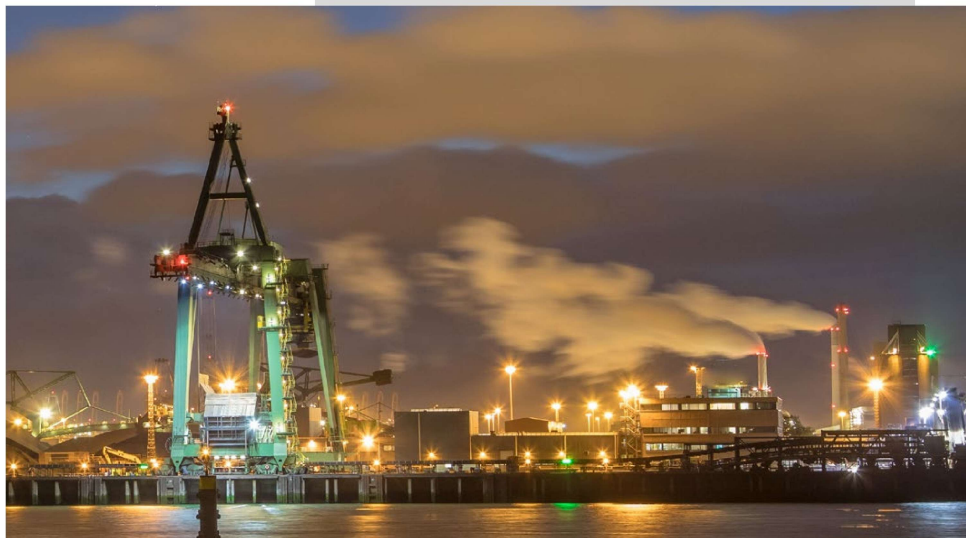


### Types


PRODUCT CODE	POWER	LUMINOUS FLUX	COLOUR TEMP.	WEIGHT
FLA3200.XXX24	200W	33.200lm	3000K 4000K	4,0kg
FLA3400.XXX24	400W	66.600lm		7,2kg
FLA3600.XXX24	600W	99.600lm		11,7kg
FLA3800.XXX24	800W	132.800lm		14,2kg

- 1 Light distribution
- 2 Colour temp.
- 3 Housing colour
- 1... DALI dim
- 2... SPOT 30°
- 3... 3000K
- 3... 0-10V dim
- 2... MEDIUM 60°
- 4... 4000K
- 3... WIDE 90°
- V... ASYMMETRISCH 109°x26°

### Light distribution

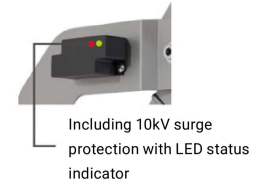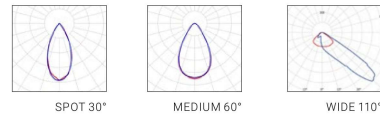

### Asymmetric light distribution



### Dimensions

