

Floodlights HB SERIES

Quickinfo

LUMINAIRE

ceiling, wall,
cranesurface & pole mounted,
aluminum, white/black
IP66, IK10



LED



3000K, 4000K, 5700K
CRI>80
Initial MacAdam 4 SDCM
50,000h L80

LIGHT DISTRIBUTION



ELECTRIC

ON/OFF
1-10V dim

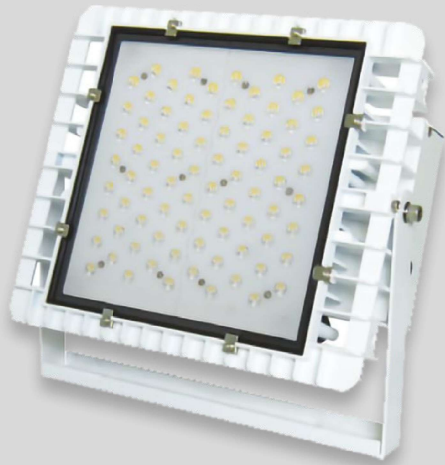

Description


High-performance floodlights made of die-cast aluminium to the highest industry standard. Developed for large outdoor applications. Extremely robust and resistant housing for the toughest environmental conditions. Highly efficient and durable light-emitting diodes with uniform light distribution and high luminous flux packages. Swivelling mounting bracket suitable for suspended and upright mounting.

Types

PRODUCT CODE	POWER	LUMINOUS FLUX	LIGHT DISTRIBUTION	COLOUR TEMP.	WEIGHT
FLHB040.3XX2X	40W	4.000lm	SPOT 15° SPOT 30° MEDIUM 60° MEDIUM 80° WIDE 110°	3000K 4000K 5.700K	2,4kg
FLHB060.3XX2X	60W	6.000lm			2,4kg
FLHB085.3XX2X	85W	8.670lm			2,9kg
FLHB100.3XX2X	100W	10.200lm			2,9kg

1	2	3	1 Light distribution	2 Colour temp.	3 Housing colour
1... SPOT 15°	3... 3000K	2... white	1... SPOT 15°	4... 4000K	3... black
2... SPOT 30°	5... 5700K		3... MEDIUM 60°		
3... MEDIUM 60°			4... MEDIUM 80°		
4... MEDIUM 80°			1... WIDE 110°		
1... WIDE 110°					

Light distribution

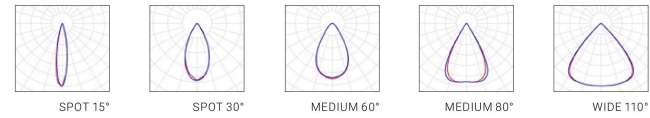

Dimensions

